
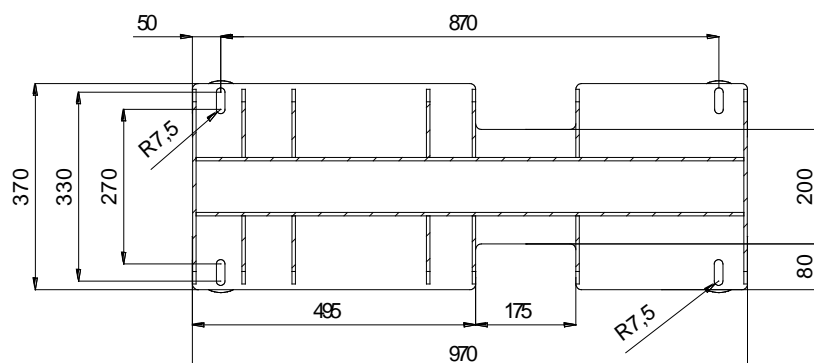
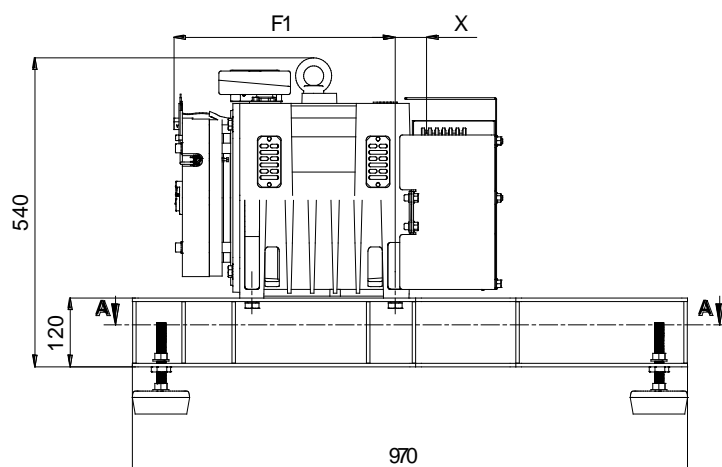
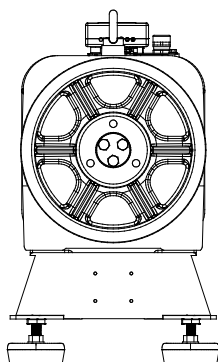


GENERAL FEATURES

- Bedframe for maGO machine (with pulleys Ø240 and Ø320 mm)
- Machine support without deflection pulley.
- Maximum admissible static load 30 kN.
- P+Q max. = 1450 kg.
- 4 adjustable silent blocks.
- Inter rope distance from 240 mm to 360 mm.
- Full protections.

maGO MODELS	F1
maGO 075/100/125	384
maGO 150/175/200	464
maGO 225/250/275	553
SM200.20C	366
SM200.30C	432
SM200.40D	522

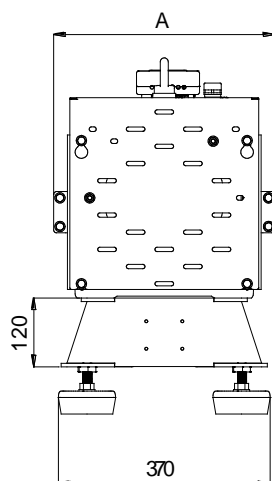

Ø MACHINE PULLEY	X	A
maGO Ø 240	43	387
maGO Ø 320	53	387
SM200.20C	34	-
SM200.30C	34	-
SM200.40D	35	-

Datasheet translated from the original in Spanish, available at MP website.
 Products constantly developed, the specifications can be modified without prior notice.