



COMPONENTE

Toma de Pedido

SP: SUSTITUCION PARCIAL - REFORMA

Cuadro ☒Premontada ☐

IEP-2020.2

CLIENTE **MP SERVICENTER**PAÍS DE INSTALACIÓN **ESPAÑA**FECHA DE ENTREGA **12/11/2019**N/REFERENCIA **9**PERIODO/SERIE **2019-71**S/REFERENCIA **R21A2CUADT9M**

PEDIDO ASOCIADO CON:

RELLENADO POR **SERVICENTER**DIRECCIÓN DE ENVÍO: **Plataforma Logística de Zaragoza (PLA-ZA), Calle ZARAGOZA, ZARAGOZA**

DATOS GENERALES CUADRO DE MANIOBRA

MICROBASIC

Nº DE UNIDADES **1**SECUENCIA **0,1,2,3,4,5,6,7,8,9**Nº DE PARADAS **10**PLANTA PRINCIPAL **0**

MOD.RESCATE

DIRECTIVAS

ADAPTACION EN81-1/2:98

EN81/28 ☐EN81/21 ☐EN81/70 ☐EN81/73 ☐

OTRAS

RENIVELACIÓN PUERTA ABIERTA ☐APROXIMACION CON PUERTAS ABIERTAS ☐RELÉS TÉRMICOS ☐

SELECTIVA EN BAJADA

☐

DIST. ENTRE ARMARIOS:

☐☐INSTALACIÓN LIBRE DE HALÓGENOS ☐MANIOBRA ELECTRICA DE SOCORRO ☐MANIOBRA INSPECCION EN CUADRO ☐AUTOTRANSFORMADOR ☐

SIMPLEX

☐ Interrup. magnetotérmicos //Dif. fuerza:☐ Alumbrado armario //Dif. Alumbrado:☐ Interruptor principal externo☐ SIN SALA MÁQUINAS

Acabado armario

Protección fuego ☐

Mano apertura

☐ SIN SALA MÁQUINAS(Oleodinámico)

Tipo de armario

Aislamiento acústico ☐

MÁQUINA/CENTRAL

☐ OLEODINÁMICO

POTENCIA

TENSIÓN DE RED

FRECUENCIA DE RED

VELOCIDAD

TENSIÓN DE VALVULAS

ARRANQUE MOTOR:

PARADA: ☐ SOFT STOP ☐ CERRAR PUERTA ☐ MODELO☐ RESISTENCIA CALENTAMIENTO ACEITE☐ REFRIGERADOR ACEITE

NÚMERO DE PISTONES:

☐ VÁLVULA ELECTRÓNICA☐ STAND-BY☒ ELÉCTRICO

MANIOBRA:

VVVF

TIPO DE VARIADOR

DSP - 10

☐ STAND-BY

ENCODER

INTERFACE:

MODELO: **PREPARACION INDUSTRIAL.1024 PULSOS**

MÁQUINA:

MARCA/MODELO **GEM**

POTENCIA

CV

TENSIÓN INSTALACION **TRIFASICO.220 VAC**FRECUENCIA DE RED **50**

Hz

TENSIÓN DE FRENO **110Vdc**INT. NOMINAL/FUNC. **30 / --**

A

Nº POLOS **4**VELOCIDAD **1**

m/s

CARGA ÚTIL EN CABINA **320**

Kg

NÚMERO DE PERSONAS **4**

CABINA

PUERTA AUTOMÁTICA

☐ DOBLE EMBARQUE☐ SELECTIVO

EMBARQUE PRINCIPAL:

MP

REVECO II

EMBARQUE SECUNDARIO:

☒ LEVA **Prep. : 110 Vdc****Preparación para 1 uds**☐ FOTOCELULA ☐ MODELO

OTROS ELEMENTOS DE CABINA

☐ POSICIONAMIENTO ABSOLUTO☒ LUZ CABINANº CONTACTO TRAMPILLA **0****TEMPORIZADA 20 seg**☒ EXTRACTOR CABINA **TEMPORIZADO 20 seg**☐ GONG (Techo cabina)☐ SINTETIZADOR VOCAL☐ INTERFONO

EXTERIOR (PLANTA)

PUERTAS

☐ AUTOMÁTICA
PLANTAS☒ SEMIAUTOMÁTICA DRCHA.PLANTAS **0,1,2,3,4,5,6,7,8,9**☐ SEMIAUTOMÁTICA IZQD.

PLANTAS

BOTONERA

Tensión Luminosos **24 Vcc**Tensión Registros **24 Vcc**☒ SUS MEDIOS☐ MP

Luminosos

Otros

BOTONERA

☐ MP ☐ MODELOUds: **1**☒ SUS MEDIOSTensión/Registro **24 Vcc**☒ PLAFÓN DE EMERGENCIA☒ DISPLAY MODELO:**633-S**☒ PULSADOR ALARMA☒ PULS. ABRIR PUERTA☐ PULS. CERRAR PUERTA☐ FLECHAS JAMBAS☐ LLAVÍN BOMBEROS☐ LLAVÍN CANTIDAD

Funciones:

☐ PULS/INTERRUPTOR STOP☒ SOBRECARGA ☒ COMPLETO

TELÉFONO MANOS LIBRES

☒ **PREPARACION (INDICAR EN OBSERVACIONES)..ANALÓGICA (TELÉFONO FIJO)**☐ BUCLE DE INDUCCIÓN☐ ALTAVOZ☐ INTERRUPTOR CANTIDAD


Funciones:

☒ FLECHAS DIRECCION☐ EN DISPLAY☐ EN DISPLAY☒ EN BOTONERA☐ EN BOTONERA☐ EN DINTEL☐ EN DINTEL☐ FLECHAS PRÓX. PART.☐ BOMBEROS☐ EN DISPLAY☐ NIVEL BOMBEROS☐ EN BOTONERA☐ 2º NIVEL BOMBEROS☐ EN DINTEL☐ EN BOTONERA☐ FLECHAS DE ACUDE☐ Caja roja de bomberos☒ RECIBIR DOCUMENTACIÓN

ESPAÑOL



N / REFERENCIA 9

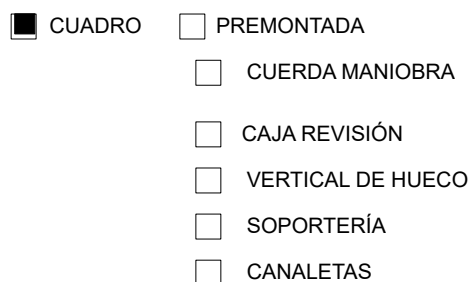

CON TRANSFORMADOR MULTITENSION MB 340VA..

—

—

Controller ☒ Pre-Assembled ☐

IEP-2020.2

CUSTOMER **MP SERVICENTER**

JOB COUNTRY

SPAINDISPATCHING DATE **12/11/2019**OUR REFERENCE **9**PERIOD/SERIES **2019-71**YOUR REFERENCE **R21A2CUADT9M**

ORDER ASSOCIATED WITH:

FILLED IN BY

SERVICENTER

DELIVERY ADDRESS

**Plataforma Logística de Zaragoza (PLA-ZA), Calle
ZARAGOZA, ZARAGOZA****MICROBASIC**QUANTITY **1**

SEQUENCE

0,1,2,3,4,5,6,7,8,9Nº OF STOP **10**

MAIN FLOOR

0

RESCUE DEVICE TYPE

- ☐ Magneto thermal sw// R.C.D.:
☐ Cabinet lighting //lighting RCD:
☐ Main switch next to the machine

DIRECTIVES**ADAPTACION EN81-1/2:98**EN81/28 ☐EN81/21 ☐EN81/70 ☐EN81/73 ☐

OTHERS

REVELLING WITH OPEN DOORS ☐OPEN DOOR APPROACHING ☐THERMAL RELAY ☐**DOWN COLLECTIVE**

DIS. BETWEEN CABINETS

SIMPLEXHALOGEN-FREE ELECTRICAL PREWIRING ☐RESCUE ELECTRIC SYSTEM (MES) ☐INSPECTION MODE, CONTROLLER ☐AUTOTRANSFORMER ☐☐ MACHINE ROOMLESS

Cabinet finish

Fire protect. ☐

Door opening

☐ MACHINE ROOMLESS (Hydraulic)

Type cabinet

Sound proofing ☐**MACHINE/ POWER UNIT**☐ **HYDRAULIC**

POWER

MAIN VOLTAGE

MAIN FREQUENCY

SPEED

VALVE VOLTAGE

ENGINE START- UP:

STOP: ☐ SOFT STOP ☐ UNIT BRAKE MODEL☐ OIL HEATER RESISTOR (Immersed)☐ OIL COOLER

NUMBER OF CYLINDERS

☐ ELECTRONIC VALVE☐ STAND-BY☒ **ELECTRICAL**

CONTROL UNIT:

VVVF

TYPE OF FREQ. CONVERSION

DSP - 10☐ STAND-BY

ENCODER

INTERFACE:

TYPE: **PREPARATION MANUFACTURER.1024 IMPULSES****MACHINE:**MAKE/ MODEL **GEM**

POWER

CV

MAIN VOLTAGE **THREE-PHASE.230** VACMAIN FREQUENCY **50** HzBRAKE VOLTAGE **110Vdc**NOMINAL/OPERAT C. **30 / --** ANº OF POLES **4**SPEED **1** m/sCAR NOMINAL LOAD **320** KgNº OF PASSENGERS **4****CAR****AUTOMATIC DOOR**☐ DOUBLE LANDING☐ DOUBLE ENTRANCE SELECTIVE**MAIN LANDING**

MP

REVECO II

SECOND LANDING☒ LEVA **Prep. : 110 Vdc**
Preparación para 1 uds☐ PHOTOCELL MODEL**OTHER ELEMENTS IN CAR**☐ ABSOLUTE POSITIONING☒ CAR LIGHTQTY. HATCH CONTAC **0****TIME-DELAYED**☒ OPERATED **30 seg** TIME DELAYED 20 seg☐ GONG (Car ceiling)☐ VOICE SINTHETIZER☐ INTERCOM (car ceiling)**STATION**☐ MP MODELQuantity **1**☒ SUPPLIED BY CUSTOMER☐ PULS/INTERRUPTOR STOPVoltage/ Register **24 Vcc**☒ EMERGENCY LIGHT☒ OVERLOAD ☒ COMPLETE
HAND FREE TELEPHONE☒ DISPLAY MODEL:**633-S**☒ **PREPARATION (INDICATE
IN REMARKS)..ANALOG
(LANDLINE PHONE)**☒ ALARM PUSHBUTTON☐ INDUCTION LOOP☒ OPEN DOOR PUSHBUTTON☐ INTERCOM☐ CLOSE DOOR PUSHBUTTON☐ JAMB ARROWS☐ FIREMAN'S KEY SWITCH☐ KEY SWITCH QUANT,

Functions:

☐ SWITCHES QUANTITY

Functions:

LANDINGS**DOORS**☐ AUTOMATIC DOOR
ATFLOORS☒ SEMIAUTOMATIC RIGHT DOOR
ATFLOORS **0,1,2,3,4,5,6,7,8,9**☐ SEMIAUTOMATIC LEFT DOOR
ATFLOORS**STATION**Illuminated sign voltage **24 Vcc**Registers sign voltage **24 Vcc**☒ supplied by customer ☐ MP

Illuminated signs

Others

☒ DIRECTION ARROWS☐ IN DISPLAY☒ IN CONTROL STATION☐ IN DOOR FRAME☐ IMMINENT DEPART. ARROWS☐ IN DISPLAY☐ IN CONTROL STATION☐ IN DOOR FRAME☐ COMING ARROWS☒ SEND DOCUMENTATION IN **SPANISH**☐ DISPLAY☐ IN CONTROL STATION☐ IN DOOR FRAME☐ FIREMAN'S☐ LEVEL FIREMAN'S☐ 2° LEVEL FIREMAN'S☐ IN CONTROL STATION☐ Firefighters' red box




Order Form

INSTALLATION DATA

2019-71

OUR REFERENCE 9

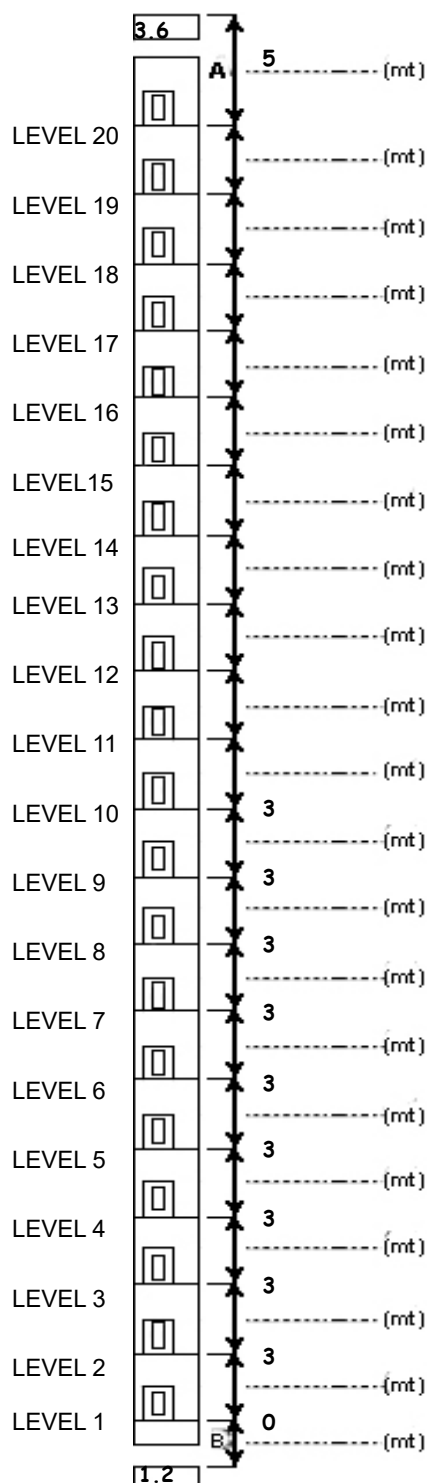

WHOLE WIRING RUN FROM CONTROLLER TO SHAFT WIRING ENTRANCE 5 m

WHOLE WIRING RUN FROM SHAFT ENTRANCE TO MACHINE

WHOLE WIRING RUN FROM CABINET/CONTROLLER TO MACHINE

LOCATION OF MACHINE ROOM: UP

SPEED GOVERNOR

Product version:

☐ AUTOMATIC REARMAMENT

OVER SPEED GOVERNOR POSITION **OVER HEAD OR MACHINE ROOM**

COUNTERWEIGHT SPEED GOVERNOR

Product version:

☐ AUTOMATIC REARMAMENT

COUNTERWEIGHT OVER SPEED GOVERNOR POSITION

☐ LADDER PIT CONTACT

OTHERS

☐ SHAFT HATCH CONTACT

PIT ☐

OVER HEAD ☐

EMERGENCY DOOR

☐ QUANTITY

☐ REDUCED OVER HEAD

☐ REDUCED PIT

☐ BUFFER CONTACT (PIT BUFFER). QUANTITY

☐ SHAFT LIGHT

☐ POWER SUPPLY FROM SWITCHBOARD TO CONTROLLER

(mt.)

☐ MRL MACHINE BEDFRAME LIGHTING

☒ LOAD WEIGHT

MODEL **PREPARATION MECANICO (PUMAQ)**

INDICATOR (1) **INDICATOR LIGHT + BUZZER (STANDARD)**

☐ FOAM PACKAGING ☒ **PACKAGING TYPE 1**

☐ TRAFFIC LIGHT Att floors

☐ RECEIVER (CONTROLLER)+TOTAL SHAFT PREINSTALATION

☐ EMITTER. NUMBER OF EMITTERS

☐ ADDITIONAL RECEIVER (CONTROLLER)

☐ MAGNET LENGTH

☐ FINAL LIMIT SWITCH

☐ PREFINAL LIMIT SWITCH TYPE

☐ ALARM GAUGE ON LANDING

☐ DOOR OPENING EMERGENCY SYSTEM

☐ COMMON PUSHBUTTON ON INSPECTION BOX

☐ DOOR SWITCH ON INSPECTION BOX

CONTROLLER REMARKS:

WITH MULTI VOLTAGE TRANSFORMER MB 340VA..

CAR CONTROL STATION REMARKS:

-

LANDING CONTROL STATION REMARKS:

-

☒ CONTROLLER BOARD ☐ PREASSEMBLED INSTALLATION

☐ TRAVELLING CABLE

☐ INSPECTION BOX

☐ SHAFT WIRING

☐ FLIXINGS PARTS

☐ RACEWAYS