
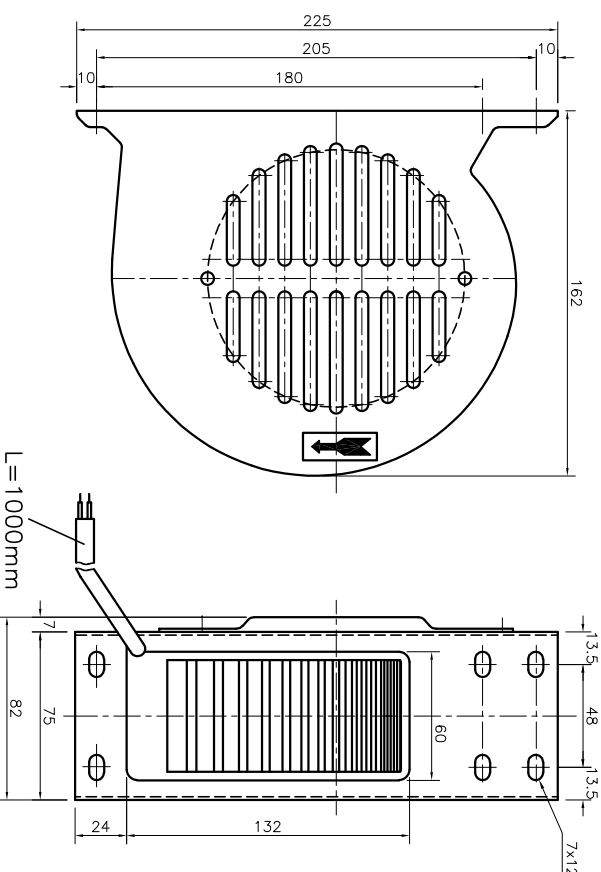


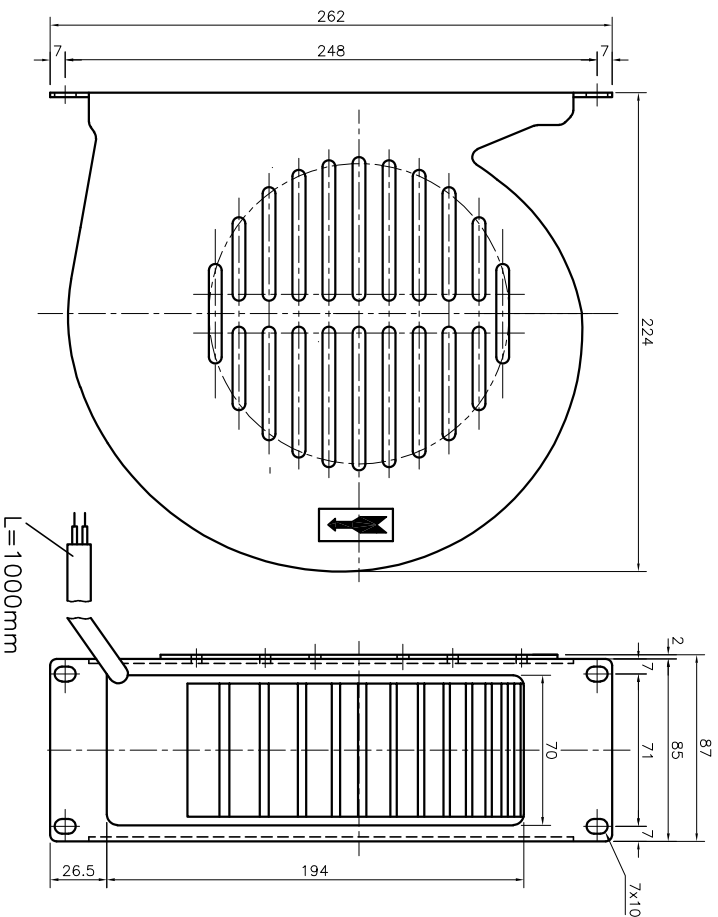

TYP	TENSION (V)	FRECUENCIA (Hz)	INTENSIDAD (A)	CAUDAL (l/br) m³/h	NIVEL DE RUIDO dBA	CONDENSADOR (uF)	PROTECCION MOTOR
NV-160.1	220	50/60	0.8	560	75	2/400	IP44
	380	50/60	0.6	560	75	1/600	"

TYP	TENSION (V)	FRECUENCIA (Hz)	INTENSIDAD (A)	CAUDAL (l/br) m³/h	NIVEL DE RUIDO dBA	CONDENSADOR (uF)	PROTECCION MOTOR
NV-140.1	110	50/60	1.64	320	55	12/250	IP44
	220	50/60	0.45	320	55	2/400	IP44
	380	50/60	0.36	320	55	1/600	IP44

NOTAS: –VIDA EN HORAS: 30000

–ESTOS VENTILADORES CUMPLEN LOS REQUISITOS DE COMPATIBILIDAD ELECTROMAGNETICA SEGUN LA DIRECTIVA 89/336/EEC (CE)

–BAJO PEDIDO SE SUMINISTRA EL TERMOSTATO PARA SU PUESTA EN MARCHA (60°C o 70°C)

–PINTURA : GRIS HIERRO RAL-7011 TEXTURADO

						AP00			
Ezougu- Merca		Deitura Denominación		Zenbat Cantidad		Arandi Código		Material Material Pisu Peso	
Medidas en milímetros		Mekanikapeparen zeinua Signo de mecanizado				Tipo Artikulo		3	
Oraipen orokorra Tolerancia general		MEDIA DIN 7168							
Murriztua Dibujado		19.02.98		I.A.B.		Iskundu Desabdu		~	
Aldaraztua Modificado						Arasatu Desabdu		▽	
Frogia Comprobado						Leardu Afinar		▽ ▽	
						Zuzendu Rectificar		▽ ▽ ▽	
Eskak Eskalok		VENTILADORES				BRAKE AND TRACTION INNOVATION		kron S.L.	
1:2.5		NV-160.1		NV-140.1		MT 07.02.03/1		Ordezten du: Sustituye o:	
10.10.16		1				Ordezten du: Sustituido por:			
Aldakuntza Modificación		Revision							

kron S.L.

BRAKE AND TRACTION INNOVATION